
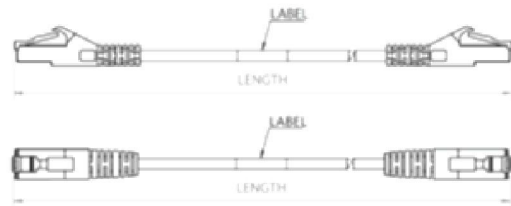


DTC PATCHCORD UTP CAT 5E

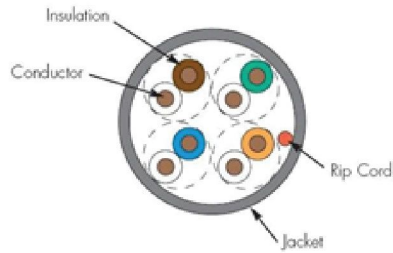

DESCRIPTION

- DTC patch cable enable you to connect all hardware destinations on a local area network , Perfect for use with 10 / 100 / 1000 base - T networks and support Gigabyte Ethernet , they comes complete RJ45 male to male Connectors and snagless molded strain relief.
- Following Standard ISO/IEC 11801. EN 50173, EN 50168 dan EIA/TIA 568A/B, EIA/-TIA 568A-B.1-2, Connector Standard IEC 60603-7

FEATURE & BENEFIT

- 6-50 micron RJ-45 staggered gold plated connectors
- Fitted with strain relief & transparent boots
- With or without reports made to the order
- 100% Tested Wiring Sequence and Continuity
- Excellent Attenuation and Crosstalk Characteristics
- Connector with staggered pin configuration to limit crosstalk
- Exceed Category 5e requirement (100 Mbps Application)
- They are available in a variety of the lengths

APPLICATION

- Concentration point
- Patchpanel
- Equipment termination

MECHANICAL CHARACTERISTIC

- Durability : 1000 plugging
- Contact : phosphor bronze with 50 μ gold plating
- Outer diameter : 5.6 mm
- Bend radius : 22.4 mm

PHYSICAL CHARACTERISTIC

- 24 AWG bare copper - PVC or LSZH jacket
- PE material insulation - PC polycarbonate material
- 4 twisted pair, cross filler - CM / CMX flame test