


DTC PATCHCORD UTP CAT 6

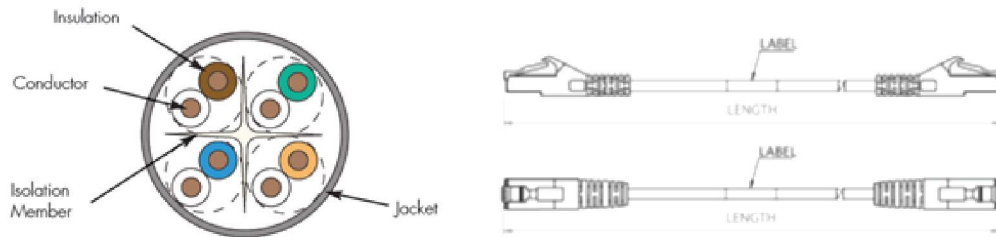

DESCRIPTION

- Perfect for use with Gigabit Ethernet , they comes complete RJ45 male to male Connectors and snagless molded strain relief, the extra foil shielding protects against Electro Magnetic Interference (EMI) and Radio Frequency Interference (RFI)

FEATURE & BENEFIT

- 6-50 micron RJ-45 staggered gold plated connectors
- Fitted with strain relief boots
- With or without reports made to the order
- 100% Tested Wiring Sequence and Continuity
- Excellent Attenuation and Crosstalk Characteristics
- Connector with staggered pin configuration to limit crosstalk
- Exceed Category 6 requirement (1 Gb Application)
- They are available in a variety of the lengths

APPLICATION

- Communication outlet
- Concentration point
- Patchpanel
- Equipment termination

MECHANICAL CHARACTERISTIC

- Durability : 1000 plugging
- Contact : phosphor bronze with 50 μ gold plating
- Outer diameter : 5.6 mm
- Bend radius : 22.4 mm

PHYSICAL CHARACTERISTIC

- 24 AWG bare copper - PVC or LSZH jacket
- PE material insulation - PC polycarbonate material
- AL foil outer shield - CM / CMX /CMR / CMP / LSZH flame test
- 4 twisted pair, cross filler